


FLEX 20 VERTICAL DOMED HIGH OUTPUT

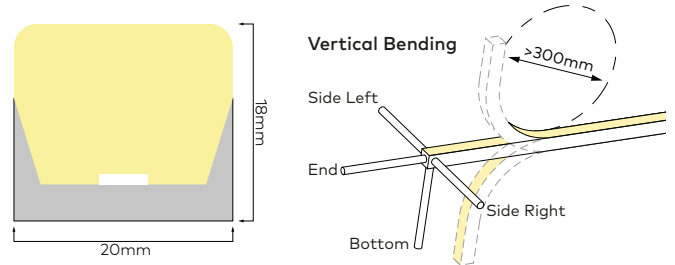

LUMINAIRE SPECIFICATION

| | |
|------------------------------|--|
| Width | 20mm |
| Height | 18mm |
| Maximum length | 10W/m and 13.5W/m : 5m 12W/m : 15m |
| Cut interval | 10W/m and 13.5W/m : 62.5mm 12W/m : 50mm |
| Minimum bend diameter | >300mm |
| Material | White silicone |
| Mounting | Surface |
| IP Rating | IP67 |
| Protection | UV, flame, salt and chlorine resistant |
| Standards | EN/AS/NZS 60598-2-1, 62031, 62471 |
| Warranty | 5 Years |

LED SPECIFICATION

| | | | |
|---------------------------|---|----------|----------|
| LED Wattage | 10W/m , 12W/m and 13.5W/m options | | |
| CCT | See options table below | | |
| CRI | >80Ra and >90Ra options | | |
| Lumen package | | CRI >80 | CRI >90 |
| | 10W/m | 870lm/m | 785lm/m |
| | 12W/m | 820lm/m | 740lm/m |
| | 13.5W/m | 1220lm/m | 1100lm/m |
| Binning | 3 Step | | |
| Lifetime (L70) | 50,000hrs based on LM-80 & TM-21 applicable test data | | |
| Driver requirement | Constant voltage | | |
| Voltage | 24VDC | | |

ORDERING INFORMATION

| MODEL | JACKET | CRI | CCT | LED TYPE | CABLE ENTRY | CONNECTOR IP | CABLE LENGTH | LENGTH |
|--|---------|-----------|-------------|-----------|--|--------------|--------------|--------------|
| 63S20VD Neon Flex 20 Vertical Domed | 1 White | B CRI >80 | 18 1800K | S10 10W/m | E End B Bottom SL Side Left SR Side Right | 7 IP67 | 003 0.3m | .XXXX |
| | | | 24 2400K | S12 12W/m | | | 010 1m | Length in mm |
| | | 27 2700K | S13 13.5W/m | 030 3m | | | | |
| | | 30 3000K | | 050 5m | | | | |
| | | 35 3500K | | 100 10m | | | | |
| | | 40 4000K | | | | | | |
| | | 60 6000K | | | | | | |
| | | | | | | | | |
| 63S20VD | 1 | | | | 7 | | | |