
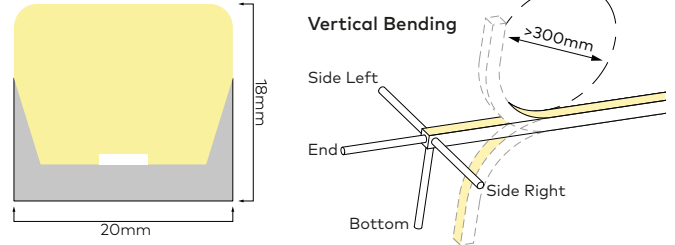


## FLEX 20 VERTICAL DOMED RGBW

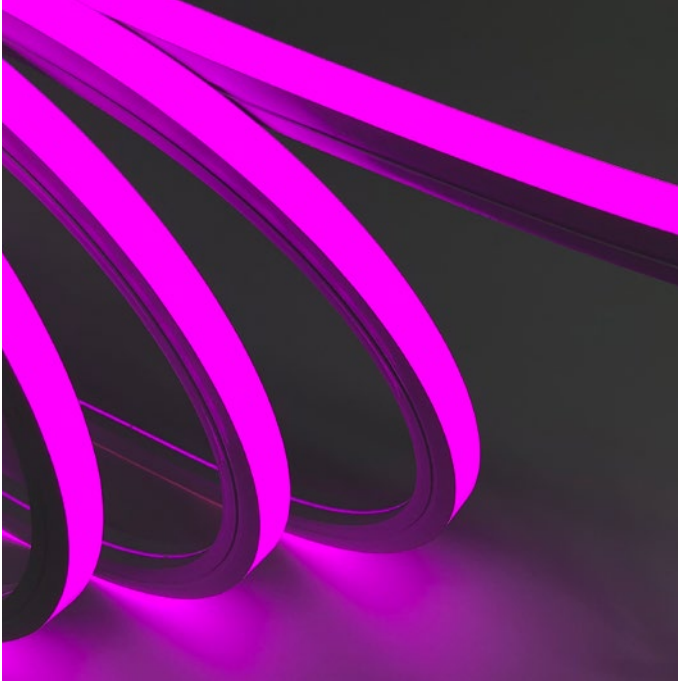

### LUMINAIRE SPECIFICATION

<b>Width</b>	20mm
<b>Height</b>	18mm
<b>Maximum length</b>	5m and 10m options
<b>Cut interval</b>	100mm
<b>Minimum bend diameter</b>	>300mm
<b>Material</b>	White silicone
<b>Mounting</b>	Surface
<b>IP Rating</b>	IP67
<b>Protection</b>	UV, flame, salt and chlorine resistant
<b>Standards</b>	EN/AS/NZS 60598-2-1, 62031, 62471
<b>Warranty</b>	5 Years

### LED SPECIFICATION

<b>LED Wattage</b>	16W/m
<b>CCT</b>	See options table below
<b>Lumen package</b>	R : 70lm/m, G : 160lm/m, B : 30lm/m W : 200m/m
<b>Lifetime (L70)</b>	50,000hrs based on LM-80 & TM-21 applicable test data
<b>Driver requirement</b>	Constant voltage
<b>Voltage</b>	24VDC

### ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH	
63S20VD Neon Flex 20 Vertical Domed	1	White	<b>RGBW27</b> RGBW-2700K	<b>S16</b> 16W/m (5m max.) <b>L16</b> 16W/m (10m max.)	<b>E</b> End <b>B</b> Bottom <b>SL</b> Side Left <b>SR</b> Side Right	<b>7</b> IP67	<b>003</b> 0.3m	<b>.XXXX</b> Length in mm
			<b>RGBW30</b> RGBW-3000K				<b>010</b> 1m	
			<b>RGBW40</b> RGBW-4000K				<b>030</b> 3m	
			<b>RGBW60</b> RGBW-6000K				<b>050</b> 5m	
							<b>100</b> 10m	
<b>63S20VD</b>	<b>1</b>				<b>7</b>			