




FLEX 12 HORIZONTAL DMX PIXEL RGBW

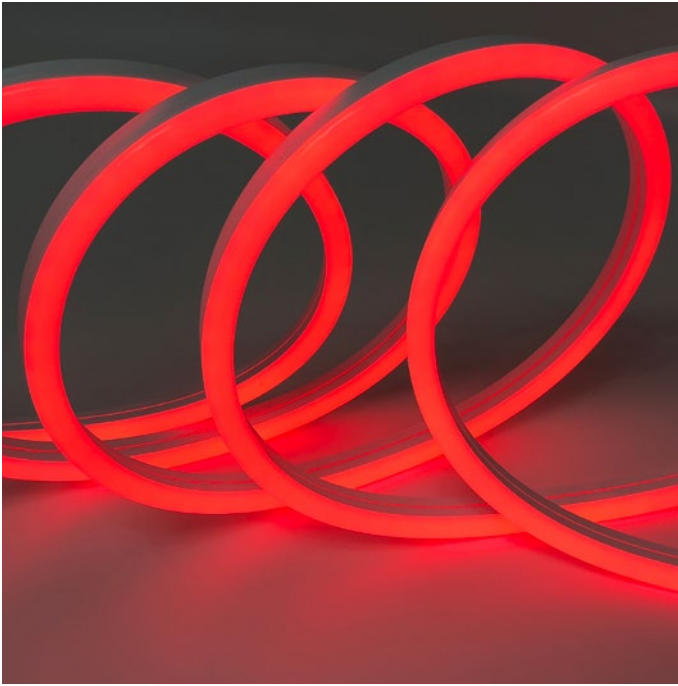

Horizontal Bending

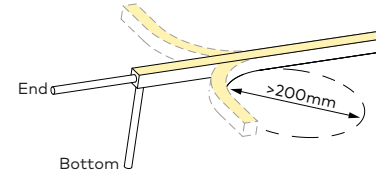

LUMINAIRE SPECIFICATION

Width	12mm / 15mm
Height	25mm
Maximum length	5m with 10m input cable 8m with 0.5m input cable
Cut interval	100mm
Minimum bend diameter	>200mm
Material	White silicone
Mounting	Surface
IP Rating	IP67
Protection	UV, flame, salt and chlorine resistant
Standards	EN/AS/NZS 60598-2-1, 62031, 62471
Warranty	5 Years

LED SPECIFICATION

LED Wattage	16W/m
LED Type	DMX Pixel
LED Qty	60 LEDs/m
Pixel Qty	10 Pixels/m
CCT	See options table below
Lifetime (L70)	50,000hrs based on LM-80 & TM-21 applicable test data
Driver requirement	Constant voltage
Voltage	24VDC

ORDERING INFORMATION

MODEL	JACKET	CCT	LED TYPE	CABLE ENTRY	CONNECTOR IP	CABLE LENGTH	LENGTH
63S12H Neon Flex 12 Horizontal	1 White	RGBW27 RGBW-2700K RGBW30 RGBW-3000K RGBW40 RGBW-4000K RGBW60 RGBW-6000K	DMX10P16 16W/m 10P/m	E End B Bottom SL Side Left SR Side Right	7 IP67	003 0.3m 010 1m 030 3m 050 5m 100 10m	.XXXX Length in mm
63S12H	1		DMX10P16		7		