


## FLEX 15 VERTICAL DMX PIXEL TUNABLE

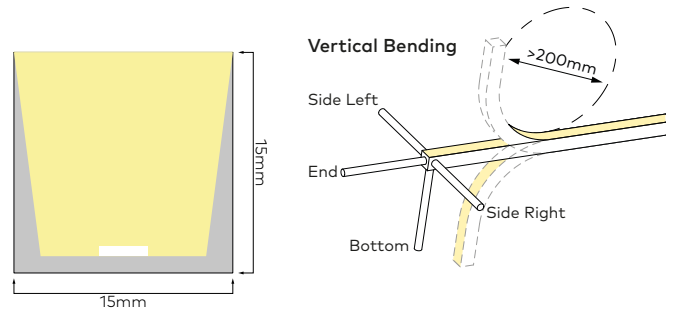

### LUMINAIRE SPECIFICATION

|                              |   |
|------------------------------|---|
| <b>Width</b>                 | 15mm  |
| <b>Height</b>                | 15mm  |
| <b>Maximum length</b>        | 5m with 10m input cable<br>8m with 0.5m input cable |
| <b>Cut interval</b>          | 125mm   |
| <b>Minimum bend diameter</b> | >200mm  |
| <b>Material</b>              | White silicone                                      |
| <b>Mounting</b>              | Surface   |
| <b>IP Rating</b>             | IP67  |
| <b>Protection</b>            | UV, flame, salt and chlorine resistant              |
| <b>Standards</b>             | EN/AS/NZS 60598-2-1, 62031, 62471                   |
| <b>Warranty</b>              | 5 Years   |

### LED SPECIFICATION

|                           |   |
|---------------------------|---|
| <b>LED Wattage</b>        | 13W/m   |
| <b>LED Type</b>           | DMX Pixel   |
| <b>LED Qty</b>            | 64 LEDs/m   |
| <b>Pixel Qty</b>          | 16 Pixels/m   |
| <b>CCT</b>                | See options table below                               |
| <b>Binning</b>            | 3 Step  |
| <b>Lifetime (L70)</b>     | 50,000hrs based on LM-80 & TM-21 applicable test data |
| <b>Driver requirement</b> | Constant voltage                                      |
| <b>Voltage</b>            | 24VDC   |

### ORDERING INFORMATION

| MODEL                           | JACKET  | CCT | CCT   | LED TYPE   | CABLE ENTRY            | CONNECTOR IP | CABLE LENGTH | LENGTH                |
|---------------------------------|---------|-----|-------|------------|------------------------|--------------|--------------|-----------------------|
| 63S15V<br>Neon Flex 15 Vertical | 1 White | C18 | 1800K | 24 2400K   | CTDMX16P13 13W/m 16P/m | 7 IP67       | 003 0.3m     | .XXXX<br>Length in mm |
|                                 |         | C24 | 2400K | 27 2700K   |                        |              |              |                       |
|                                 |         | C27 | 2700K | 30 3000K   |                        |              |              |                       |
|                                 |         | C30 | 3000K | 35 3500K   |                        |              |              |                       |
|                                 |         | C35 | 3500K | 40 4000K   |                        |              |              |                       |
|                                 |         | C40 | 4000K | 60 6000K   |                        |              |              |                       |
| 63S15V                          | 1       |     |       | CTDMX16P13 |                        | 7            |              |                       |